

FID-30R/FID-31R

NEW

# One-Shot, Detects All




*Optical Fiber Identifier*

## *FID-30R / FID-31R*

*with Optical Power Meter*

*Standard Model*


- World's highest signal detection sensitivity
- ONU signal detecting function
- Trigger lock / Robust Body design
- 2.4" color touch screen with backlight
- Adjustable settings  
Result retaining / Buzzer Volume /  
Backlight brightness / Auto dimming / Auto power OFF

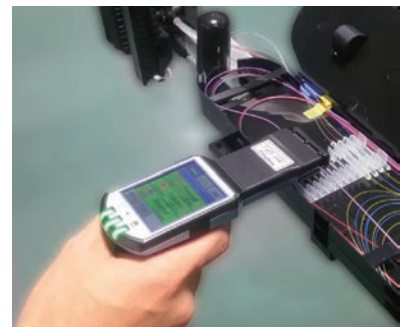



Operation Style

 **Fujikura**

# FID-30R / FID-31R Optical Fiber Identifier



Detecting external light

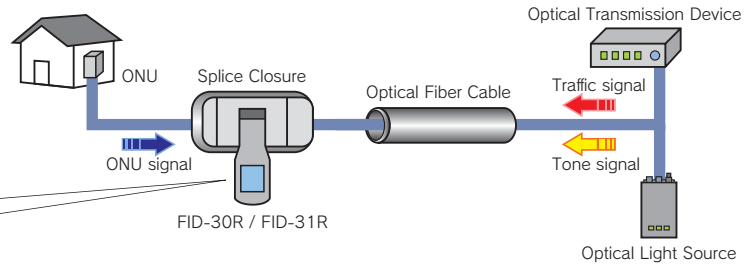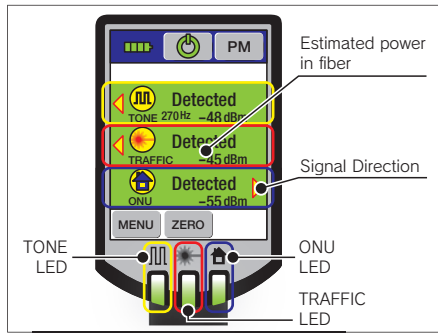

## APPLICATION & OPTICAL SPECIFICATION

Fiber application	Detecting all signals individually automatically						Insertion loss (dB)			Sensitivity (dBm) <sup>*2</sup>		
	Traffic (CW)	270 Hz	1 kHz	2 kHz	ONU signal <sup>*1</sup>	Signal direction	1310 nm	1550 nm	1650 nm	1310 nm	1550 nm	1650 nm
Single fiber 0.25 mm (R30)	✓	✓	✓	✓	✓	✓	0.2	1.0	2.5	-58 (-53 / -64)	-67 (-62 / -73)	-67 (-62 / -73)
Single fiber 0.25 mm (R15)	✓	✓	✓	✓	✓	✓	0.1	0.3	1.0	-44 (-39 / -50)	-57 (-52 / -63)	-57 (-52 / -63)
Single fiber 0.5 mm	✓	✓	✓	✓	✓	✓	0.2	1.0	2.5	-58 (-53 / -64)	-67 (-62 / -73)	-67 (-62 / -73)
Single fiber 0.9 mm	✓	✓	✓	✓	✓	✓	0.3	1.5	2.5	-28 (-23 / -34)	-33 (-28 / -39)	-38 (-33 / -44)
Fiber ribbon up to 12 fibers	✓	✓	✓	✓	✓	✓	0.3	1.0	2.5	-44 (-39 / -50)	-57 (-52 / -63)	-57 (-52 / -63)
Fiber cord 1.1 to 1.5 mm	✓	✓	✓	✓	✓	✓	0.3	1.0	2.5	-43 (-37 / -53)	-55 (-50 / -61)	-55 (-50 / -61)
Fiber cord 1.7 to 2.0 mm	✓	✓	✓	✓	✓	✓	0.5	2.0	3.0	-22 (-17 / -28)	-27 (-22 / -33)	-27 (-22 / -33)
Fiber cord 3.0 mm	✓	✓	✓	✓	✓	✓	1.0	3.0	3.0	-20 (-15 / -25)	-23 (-18 / -28)	-23 (-18 / -28)

NOTE : Insertion loss and Sensitivity varies due to coating material / color, etc.

ONU Detector Operating range	Wavelength range	ONU Detector Operating range
G(E) -PON upper stream signal	900 - 1700 nm	-7.5 ~ +9.0 dBm
G(E) -PON down stream signal		-25.5 ~ -6.2 dBm
VCAST down stream signal		-12.0 ~ +3.3 dBm
B-PON upper stream		-5.5 ~ +4.0 dBm
B-PON down stream		-20.6 ~ -11.7 dBm

## SPECIFICATIONS

<b>Applicable fiber</b>	<b>Fiber type</b>	Singlemode fiber
	<b>Sheath / Count</b>	0.25 mm coating, Ribbon fiber up to 12-fiber, or Fiber cord : 1.1 mm, 1.5 mm, 1.7 mm, 2.0 mm, or 3.0 mm
<b>Optical characteristics</b>	<b>Wavelength range</b>	900 to 1700 nm
	<b>Detectable light signals</b>	Traffic signal (CW), Light signal with modulated tones at 270 Hz, 1 kHz, or 2 kHz (square wave 50 ± 10 % duty cycle)
<b>Shock Resistance</b>		76 cm (30 inch) drop <sup>*3</sup>
<b>Operating / Storage conditions</b>		-10 to +50 °C, 0 to 95 % RH / -20 to +60 °C, 0 to 95 % RH
<b>Power supply / Battery Life</b>		1.2 to 1.5 V DC with two AA batteries / Approximately 8 hours by alkaline batteries at room temperature
<b>Dimensions and weight</b>		50 (W) × 115 (H) × 212 (D) mm, 230 g including battery
<b>Power meter (FID-30R only)</b>	<b>Wavelength response</b>	1310 nm, 1490 nm, 1550 nm
	<b>Detectable light signals</b>	Traffic signal (CW), Light signal with modulated tones at 270 Hz, 1 kHz, or 2 kHz (square wave 50 ± 10 % duty cycle)
	<b>Detecter Sensitivity</b>	+10 to -60 dBm at modulated tone / +10 to -40 dBm at CW light (traffic signal)
	<b>Accuracy</b>	Within ± 0.3 dB at room temperature

<sup>\*1</sup> require optimization for use by authorized distributor.

<sup>\*2</sup> Nomal (Fast / Fine) mode typical data.

<sup>\*3</sup> Carried out in Fujikura labs in Japan. The test do not guarantee that the product will not be damaged under this condition.

## STANDARD PACKAGE


Optical fiber identifier	Plunger	Carrying case	Instruction manual	Quick reference guide	Power meter Connector head
FID-30R	PL-06	FID-CASE-02	IM-FID30R	QR-30R/31R-E	OCH-02-UC (Ø2.5 Universal type)
FID-31R	PL-06	FID-CASE-02	IM-FID30R	QR-30R/31R-E	-

NOTE : FID-30R / 31R standard package doesn't include batteries.

## OPTIONAL ITEMS

Description	Model No.	Use for
Connector head	OCH-02-SC	FID-30R, SC connector
	OCH-02-FC	FID-30R, FC connector
	OCH-02-ST	FID-30R, ST connector
	OCH-02-LC	FID-30R, LC connector

## STANDARD PACKAGE (FID-30R)

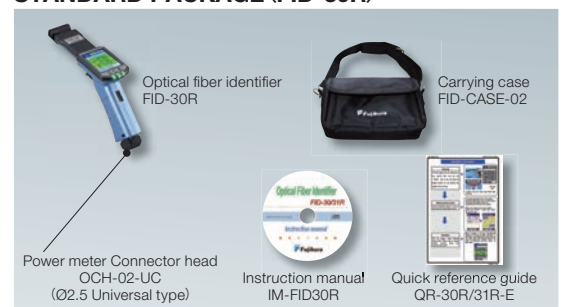

Please visit **NEW** web site!

<http://www.fusionsplicer.fujikura.com>

**Facebook**  
<https://www.facebook.com/FujikuraFusionSplicers>

**twitter**  
<https://twitter.com/fujikurasplicer>

Specifications and descriptions are subject to change without prior notice.

**Fujikura Ltd.**

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan  
Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

**Fujikura Asia Ltd.**

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967  
Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

**Fujikura Europe Ltd.**

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK  
Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

**AFL Telecommunications**

260, Parkway East, Duncan, SC29334, USA  
Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.aflglobal.com>

**Fujikura (China) Co., Ltd.**

16th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA  
Phone +86-21-6841-3636 FAX +86-21-6841-2070